

SAFE SAILING

FORWARD LOOKING SONAR

FLS 3D TECHNICAL DATA SHEET

SPECIFICATIONS	
Operational Speed	• Up to 20 Knots
3D Forward Looking Image	• Yes
Display	• 3rd part dependent
Bottom Mapping Range	• 20x water depth
Display Update Rate	• 1 second pr. update
Maximum Depth Detection	• 100m
Maximum Forward Range	• 200m
Operating Frequency	• 200 kHz
Power Requirements	• 12/24 V, ~20W
Maximum Output Power	• 28W
Angular Accuracy	• ~1.5 degree
Roll/Pitch Stabilization	• N/A
Operating System	• Windows
Update Rate	• 1 – 1½ second
Video Output	• HDMI and VGA
Multi Display Option	• Yes
Integrates Directly With	• Raymarine, Simrad, B&G and Lowrance

Standard Kit FLS 3D Gen4 For Raymarine, Simrad, B&G and Lowrance Integration

- 2 x FLS 3D 5" Transducer
- 2 x 5" Bronze Thru Hull Skin Fitting
- 2 x Transducer Extension Cable
- 1 x FLS 3D Transducer Interface Box
- 1 x FLS 3D Data Cable
- 1 x FLS 3D Visual Processor
- 1 x On/Off Switch
- Power cables

Standard Kit FLS 3D For 3rd Parrrty Display

- 2 x FLS 3D 5" Transducer
- 2 x 5" Bronze Thru Hull Skin Fitting
- 2 x Transducer Extension Cable
- 1 x FLS 3D Transducer Interface Box
- 1 x FLS 3D Data Cable
- 1 x FLS 3D Visual Processor
- 1 x FLS 3D Keypad
- Power cables




SAFE SAILING


FORWARD LOOKING SONAR

FLS 3D TECHNICAL DATA SHEET


FLS 3D Visual Processor

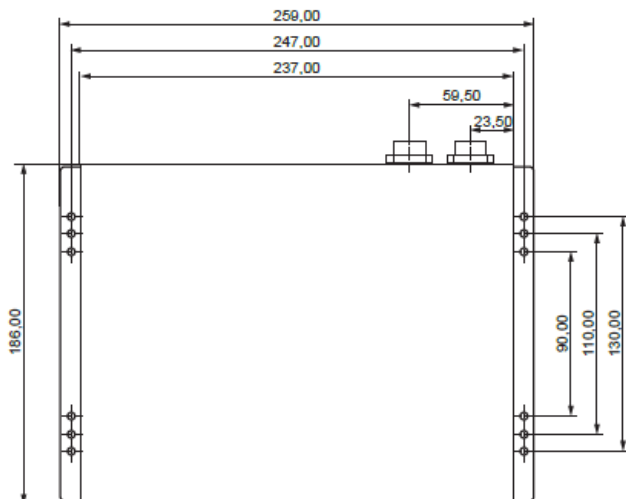


FLS 3D Transducer Interface Box

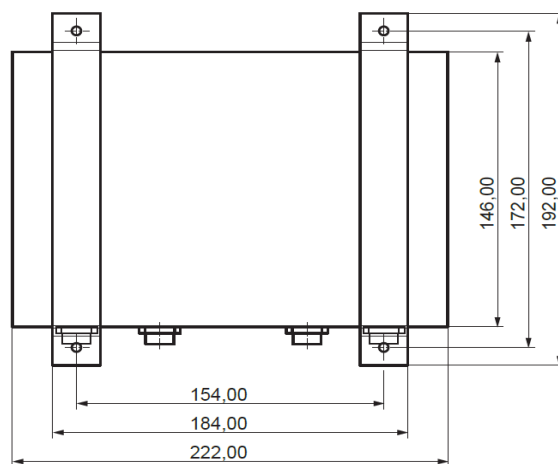


5" Bronze THru Hull SkinFitting

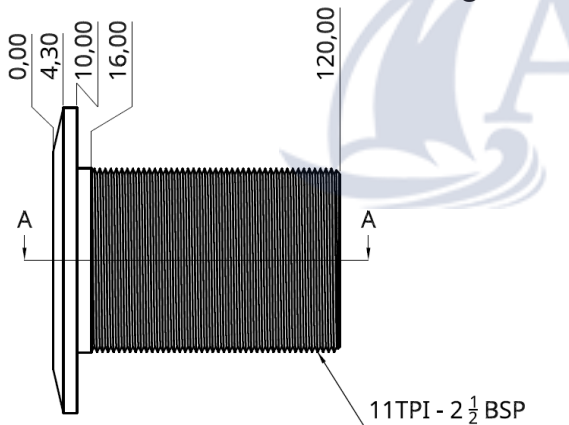

10" Bronze THru Hull SkinFitting

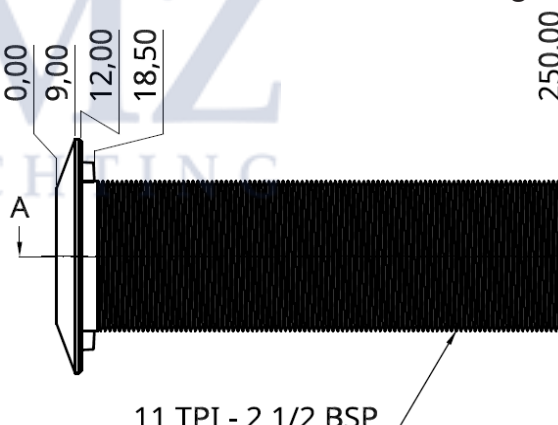

FLS 3D Keypad

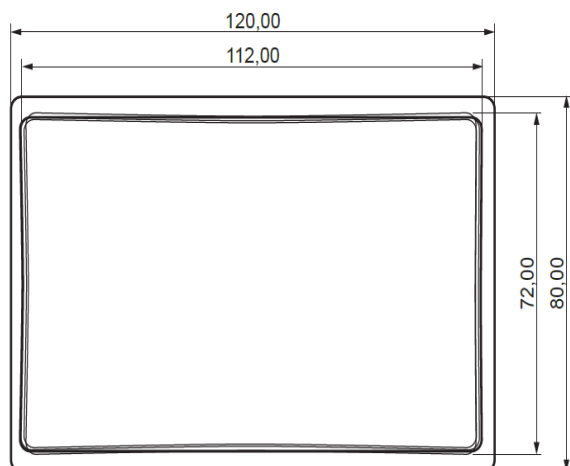

FLS 3D On/Off Button

