



INSTRUMENTS

Shut off Valves & Sensors (SoV)



Many large superyachts, sail and motor, are built with gate-valves to meet class/survey requirements and to allow insertion and removal of speed and depth sensors safely and with no water ingress.

A+T are the only manufacturer supplying these gate valves for refits and new-builds as well as the depth and speed sensors for them.

All valves are tested and issued with a test certificate for 5 bar of pressure. Custom length sensors can be built on request.

Range Available:



Valve compatible with SOV speed and depth sensors.



Isolation kit – used when valve is fitted to carbon, aluminium or steel hulls
Replacement for B&G 155-30-017.



Shut Off Valve Depth Sensor
170 kHz for use with B&G H2000 & H3000.
Replacement for B&G 157-AA-038.



Replacement Paddlewheel Kit
for A+T and B&G SOVs.




Shut Off Valve Paddlewheel Speed Sensor
Replacement for B&G 202-00-064.



INSTRUMENTS

Shut off Valves & Sensors (SoV)

Typical Configurations

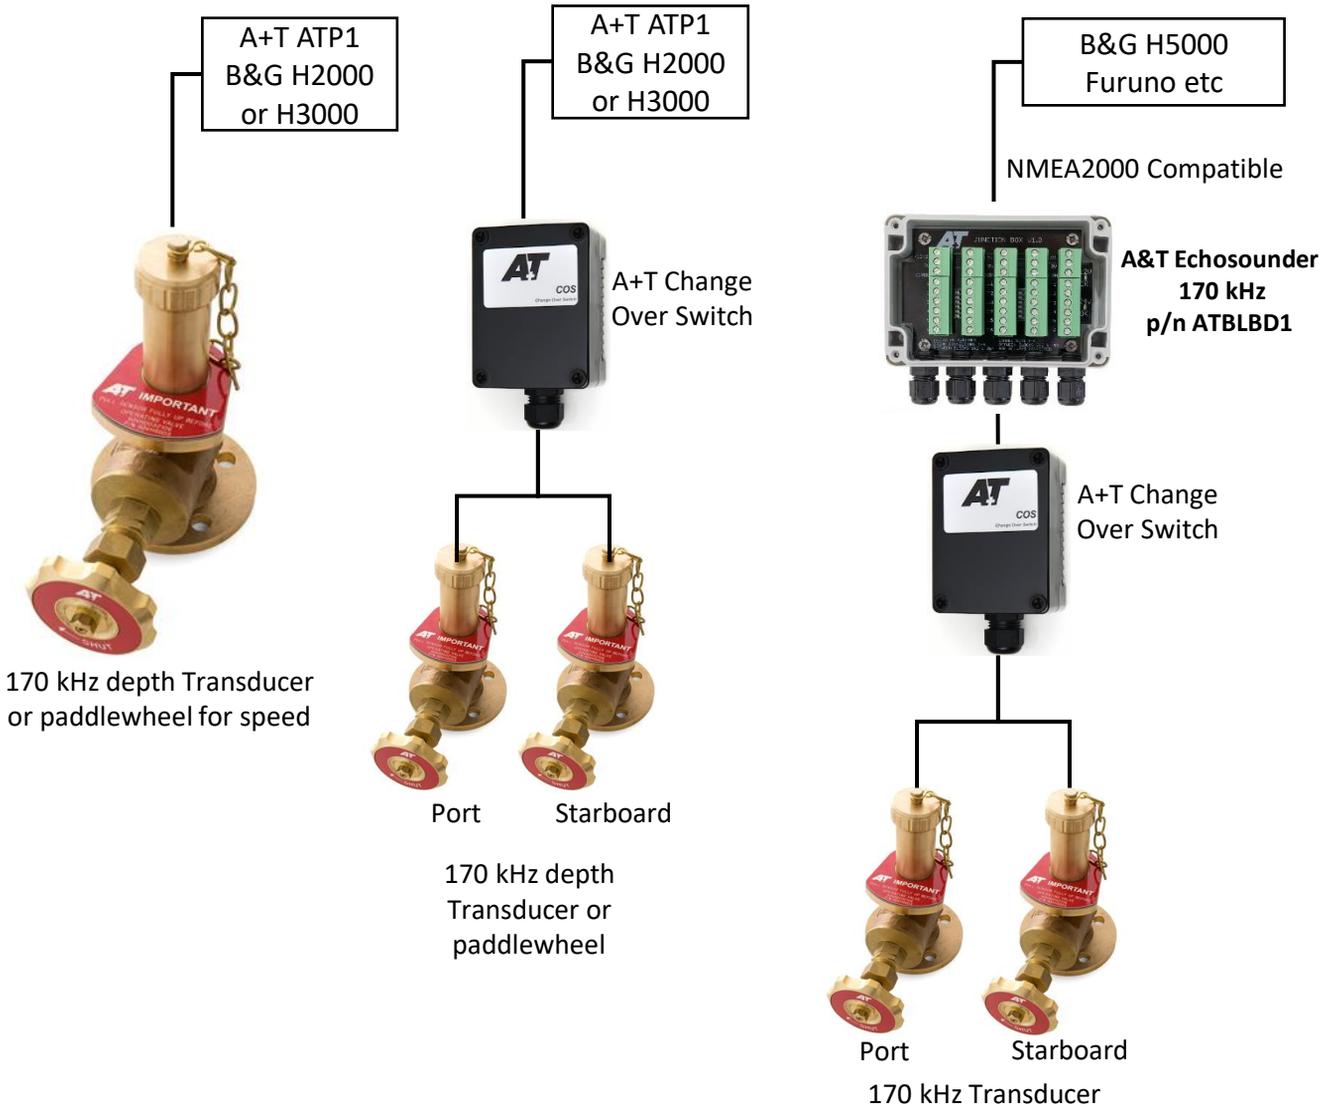

A+T offer a range of Change Over Switches, please see our website for further details:

<https://www.aandtinstruments.com/products/spares-accessories/>

Warranty and support

- 1 year's warranty is offered on A+T products on return to factory basis
- Warranty starts from earliest date first used or 1 year after leaving factory
- Warranty voided if opened except by A+T. Integral tamper sensor fitted in unit
- 24/7 telephone support is provided direct from A+T Instruments Ltd